

V-13AF8

Lift-A-Lift® Industrial Vehicle Service Lift

Fast, Safe and Easy Maintenance for Forklifts, Industrial Vehicles and Light Trucks

Tilt-or-Lift, Inc., the leading designed of specialty lifts since 1973, has raised the art of industrial vehicle maintenance to new heights with the *Lift-A-Lift*® service lift.

The *Lift-A-Lift*® service lift, model V-13A, is designed to allow complete access to the underside parts of forklifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. The self-leveling lift raised the vehicle up to 71 inches so all maintenance can be performed while standing.

High Marks for Safety and Versatility

The *Lift-A-Lift*® service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The *Lift-A-Lift*® service lift is portable and has removable runway panels and floor beam for easier access. Standard 16 inch wide runways are factory set at 52 to 68 inches (outside dimension) to accommodate a wide range of Vehicles. The lift is available in 13,000 lbs. GVW capacity. A variety of popular options are available to further enhance its utility. All lifts are shipped assembled, factory tested, and carry a full one-year warranty.

The *Lift-A-Lift*® service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

"We stand under our products."



**Manufacturers of
Fork Lift Maintenance Lifts**

P.O. Box 8728
Maumee, Ohio 43537-8728
Tilt-A-Lift®, Lift-A-Lift®, Tipper™, Tilter™, Port-A-Lift™

Telephone: (419) 893-6944
www.tiltorlift.com
email: sales@tiltorlift.com



Lift-A-Lift® Industrial Vehicle Service Lift

Specifications

Model V-13AF8

- Weight Capacity: 13,000 lb. G.V.W.
- Entry Width: 52" to 68"
(Specify 4" Increments)
- Minimum Ceiling Height: 12'-10"
- Ramp Length: 4'-0"
- Max. Runway Height: 71"
- Safety Locks: Automatic
- Motor: 3 HP
- Power: 3 Phase
- Shipping Weight: 6,200 lbs.
- 20" to 36" Inside Working Width
(Specify 4" Increments)

All units are subject to change and modifications.


Note: Dimensions may change without notice.

Features

- Portable Hydraulic Lift
- Automatic Safety Locks
- Auto Self Leveling System
- Removable Runway Panels
- Shipped Assembled and Factory Tested

Options

- Hydraulic Motor/Transmission Jack
- Ramp – 10'-0" Long
- Pallet Jack Combo Kit
 - Center Ramp & (2) Side Rails
- Wheel Freeing Device
- Three-Wheel Platform

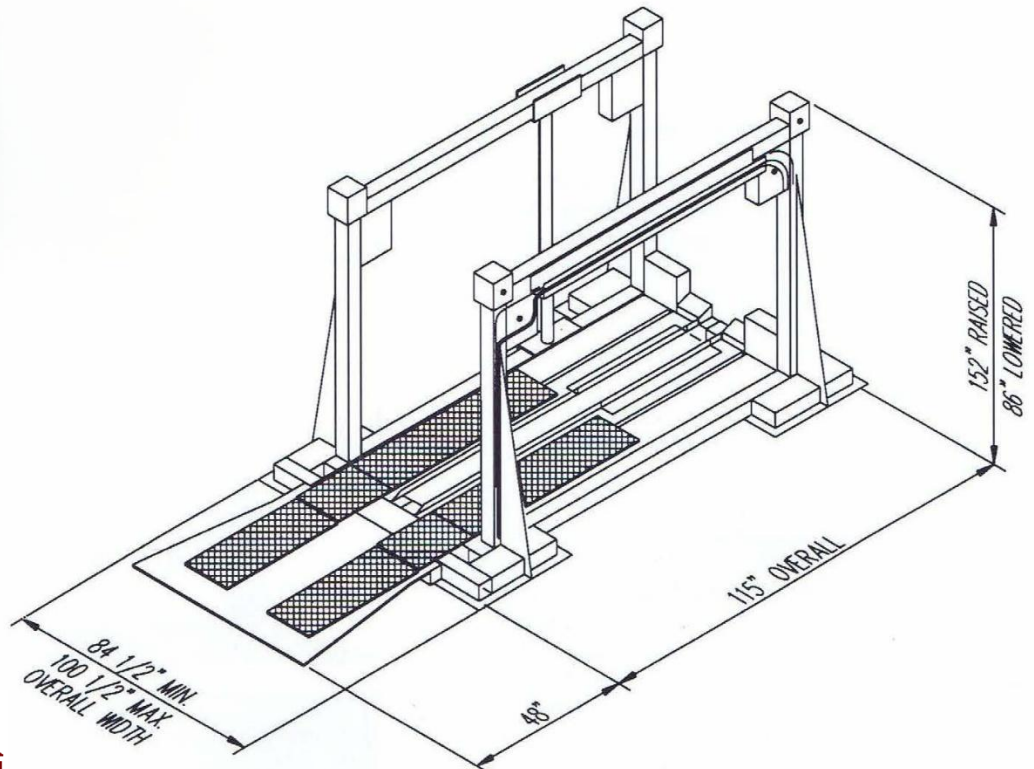

**Manufacturers of
Fork Lift Maintenance Lifts**

P.O. Box 8728
Maumee, Ohio 43537-8728
Tilt-A-Lift®, Lift-A-Lift®, Tipper™, Tiliter™, Port-A-Lift™

Telephone: (419) 893-6944
www.tiltorlift.com
email: sales@tiltorlift.com