

## V-30ALRS

### Lift-A-Lift® Industrial Vehicle Service Lift

#### Fast, Safe and Easy Maintenance for Forklifts, Industrial Vehicles and Light Trucks

Tilt-or-Lift, Inc., the leading designed of specialty lifts since 1973, has raised the art of industrial vehicle maintenance to new heights with the *Lift-A-Lift*® service lift.

The *Lift-A-Lift*® service lift, model V-30ALRS is designed to allow complete access to the underside parts of forklifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the adjustable runways. The self-leveling lift raises the vehicle up to 72 inches, so all maintenance can be performed while standing.

#### High Marks for Safety and Versatility



The *Lift-A-Lift*® service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The *Lift-A-Lift*® service lift is portable and has removable runway panels and floor beam for easier access. Standard 18 inch wide runways adjust hydraulically from 56 to 76 inches (outside dimension) to accommodate a wide range of vehicles. The lift is available in two models: a variety of popular options are available to enhance its utility. All lifts are shipped assembled, factory tested, and carry a full one-year warranty.

The *Lift-A-Lift*® service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists.

There are no finer lifts available – anywhere.

**“We stand under our products.”**

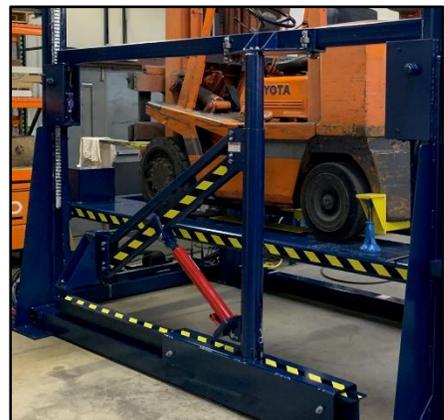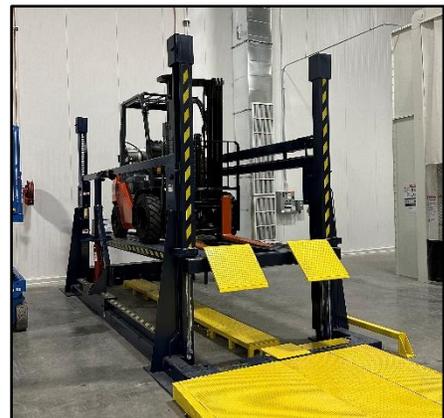

**Manufacturers of  
Fork Lift Maintenance Lifts**

P.O. Box 8728  
Maumee, Ohio 43537-8728  
Tilt-A-Lift®, Lift-A-Lift®, Tipper™, Tilter™, Port-A-Lift™

Telephone: (419) 893-6944  
[www.tiltorlift.com](http://www.tiltorlift.com)  
email: [sales@tiltorlift.com](mailto:sales@tiltorlift.com)

# Lift-A-Lift® Industrial Vehicle Service Lift

## Specifications

### Model V-30ALRS

- Weight Capacity: 30,000 lb. G.V.W.
- Runway: 18" Wide x 16'-0" Long
- Runway Adjusts From 56" to 76" (Outside Dimension)
- Minimum Ceiling Height: 12'-10"
- Ramp Length: 12'-0"
- Max. Runway Height: 72"
- Safety Locks: Automatic
- Motor: 5 HP
- Power: 3 Phase
- Shipping Weight: 8,900#

*All units are subject to change and modifications.*


**Note:** Dimensions may change without notice.

## Features

- Portable Hydraulic Lift
- 20" to 40" Inside Working Width
- Automatic Safety Locks
- Auto Self Leveling System
- Removable Runway Panels
- Removable Floor Beam
- Lockable Control Panel
- Wheel Freeing Device
- Shipped Assembled and Factory Tested

## Options

- Hydraulic Motor/Transmission Jack
- Photo Eye System
- Three-Wheel Platform

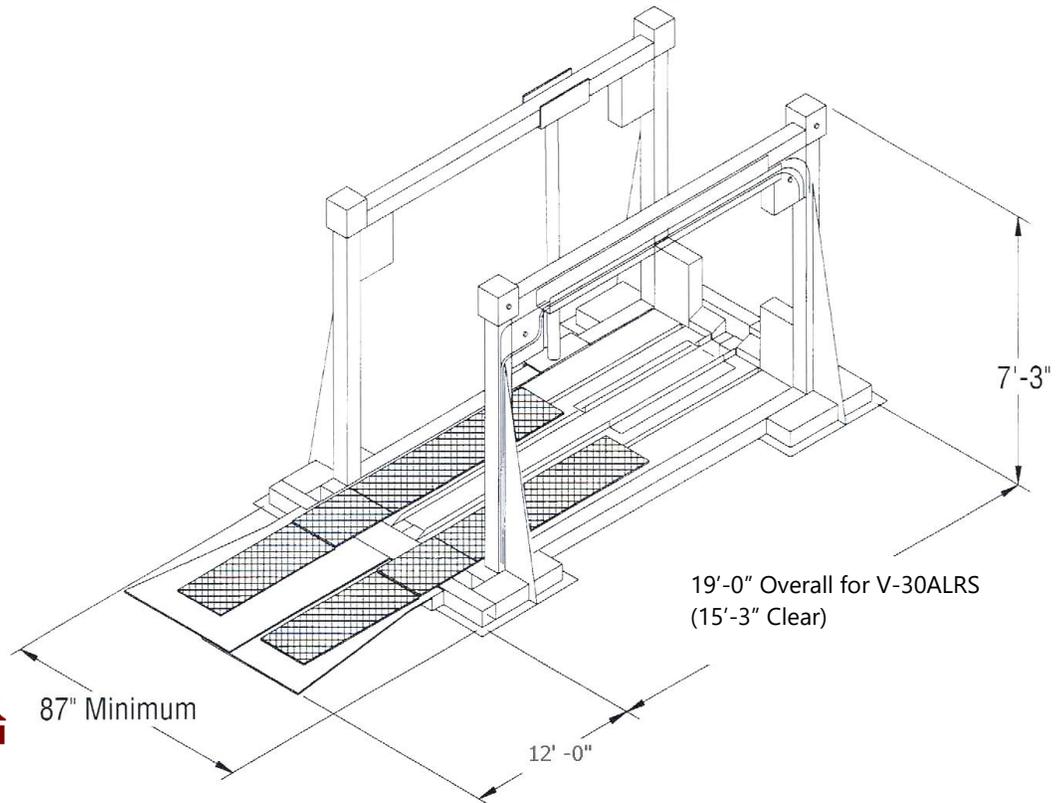

**Manufacturers of  
Fork Lift Maintenance Lifts**

P.O. Box 8728  
Maumee, Ohio 43537-8728  
Tilt-A-Lift®, Lift-A-Lift®, Tipper™, Tilter™, Port-A-Lift™

Telephone: (419) 893-6944  
[www.tiltorlift.com](http://www.tiltorlift.com)  
email: [sales@tiltorlift.com](mailto:sales@tiltorlift.com)